

# APU Loudness Limiter



User Manual  
v5.6.1

# Table of Contents

Table of Contents	2
1. Introduction	4
2. Parameters	4
2.1. Limiting	4
2.1.1. Presets	5
2.1.2. Loudness type	5
2.1.3. Target range presets	6
2.1.4. Output type	6
2.1.5. Limiter threshold	6
2.1.6. Limiter ceiling	6
2.1.7. Limiter threshold link	6
2.1.8. Limiter attack	6
2.1.9. Look-ahead	7
2.1.10. Compensation target	7
2.1.11. Compensation mode	7
2.1.12. Compensation gain	7
2.1.13. Compensation action	7
2.1.14. RMS window	7
2.1.15. Momentary window	8
2.1.16. Short-term window	8
2.1.17. Visualization	8
2.1.18. Raster type	8
2.1.19. Sidechain	8
2.1.20. Ballistics type	8
2.1.21. IIR contour type	9
2.1.22. Input gain	9
2.1.23. Release	9
2.1.24. Release hold	9
2.1.25. Linear Release	9
2.1.26. Dry/Wet	9
2.1.27. Output gain	9
2.2. Loudness	10
2.2.1. Adaptive startup	10
2.2.2. Adaptive edges	10
2.2.3. Adaptive type	10
2.2.4. Adaptive threshold	10
2.3. Visualization	11
2.3.1. Auto range	11
2.3.2. Visual range presets	11
2.3.3. Loudness range	11
2.3.4. Snapshots	12
2.3.5. Layout options	12
2.3.6. Layout source mode	12
2.3.7. Layout target mode	13
2.3.8. Layout output mode	13
2.3.9. Delta field type	13
2.3.10. Bits per pixel	13
2.3.11. Breath residual	13
2.3.12. Bar Mode	13
2.3.13. Bucket size	13
2.3.14. Histogram hold	14
2.3.15. Delta X/Y/T	14
2.3.16. Delta field	14
2.3.17. Shader params	14
2.3.18. Show thresholds	14
2.3.19. Panel params	14
2.3.20. History length	14
2.3.21. Show peak meter	15
2.3.22. Show history peak	15
2.3.23. Show axis labels	15
2.3.24. Show axis lines	15
2.3.25. Show param context	15
2.4. Theme	15
2.4.1. Theme presets	16
2.4.2. Source color	16
2.4.3. Normal color	16
2.4.4. Target color	16
2.4.5. Output color	17
2.4.6. Textures	17
2.5. Settings	17
2.5.1. BPM	17
2.5.2. Host BPM	17

2.5.3. Dither	18
2.5.4. Velocity sensitive knobs	18
2.5.5. UI Scaling	18
2.5.6. Axis Scaling	18
2.5.7. Dark mode	18
2.5.8. Gain change write	18
2.5.9. Blocksize	19
2.5.10. Look-ahead budget	19
2.5.11. Attack budget	19
2.5.12. Delay compensation	19
2.6. Update	19
2.7. About	19
<b>3. Standalone CLI</b>	<b>20</b>
<b>4. Glossary</b>	<b>20</b>
4.1. Range sliders	20
4.2. History	20
4.3. Histogram	21
4.4. Source	21
4.5. Target	21
4.6. Output	21
<b>5. Credits</b>	<b>21</b>
5.1. MIT License (libebur128)	22
5.2. MIT License (melatonin_blur)	22


# 1. Introduction

[APU Loudness Limiter](#) is a modern loudness limiter plug-in released by [APU Software, LLC](#). This plug-in is designed to simultaneously perform limiting across multiple loudness types (see [loudness type](#)). Here you can read about the different features and parameters available with the plug-in, and get a general sense of how it differs from other limiters and why.

## 2. Parameters

This software supports a variety of parameters, most of which can be adjusted in real-time. This section provides an overview of each parameter, with each subsection detailing the parameters for the associated tab in the user interface. From within the user interface, you can also hover the mouse over a slider, combo-box, or checkbox to see a popup description of the parameter.

### 2.1. Limiting

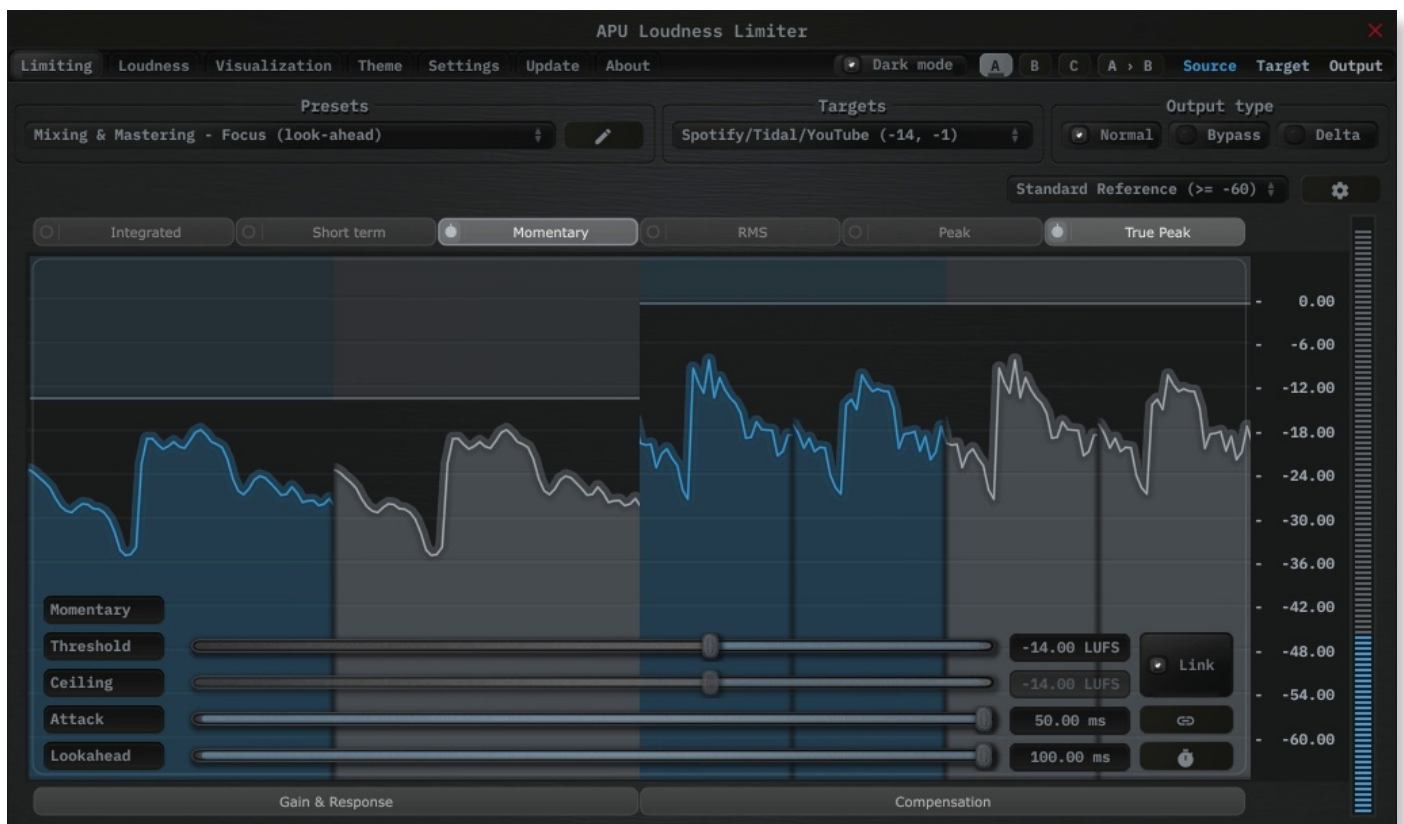

The limiting tab contains configuration and visualization for loudness limiting. This section details each of the individual parameters and components.

## 2.1.1. Presets

Loudness Limiter's presets combo-box contains a collection of basic presets, one for each combination of [loudness type](#) and latency configuration. The low-latency presets introduce minimal delay, while the look-ahead presets introduce more delay in exchange for the ability to preemptively respond to the source signal.

See [look-ahead](#) for an understanding of how delay compensation works in the plug-in.

The preset browser includes user-scope load options for ordinary preset changes. Reset on preset load runs a filtered parameter reset before the preset is applied. Load preset visual controls whether the preset can change the hinted [theme](#) and visualization settings. Full Reset always restores all default parameter values, regardless of these options. You can switch between loading dark or light themes through the [dark mode](#) parameter.

Currently, the following presets are available ("Full Reset" restores all default parameter values):

- Full Reset
- Mixing & Mastering - Tight (look-ahead)
- Mixing & Mastering - Tight HD (look-ahead)
- Mixing & Mastering - Focus (look-ahead)
- Mixing & Mastering - Focus HD (look-ahead)
- Mixing & Mastering - Present (look-ahead)
- Mixing & Mastering - Present HD (look-ahead)
- Mixing & Mastering - Deep (look-ahead)
- Mixing & Mastering - Deep HD (look-ahead)
- Mixing & Mastering - Traditional (look-ahead)
- Mixing & Mastering - Maximizer TP (look-ahead)
- Mixing & Mastering - Maximizer PK (look-ahead)
- Mixing & Mastering - Tight (low-latency)
- Mixing & Mastering - Tight HD (low-latency)
- Mixing & Mastering - Focus (low-latency)
- Mixing & Mastering - Focus HD (low-latency)
- Mixing & Mastering - Present (low-latency)
- Mixing & Mastering - Present HD (low-latency)
- Mixing & Mastering - Deep (low-latency)
- Mixing & Mastering - Deep HD (low-latency)
- Mixing & Mastering - Traditional (low-latency)
- Mixing & Mastering - Maximizer TP (low-latency)
- Mixing & Mastering - Maximizer PK (low-latency)

## 2.1.2. Loudness type

Limiting can be applied across a variety of loudness types. Each loudness type supports channel-split or channel-linked processing. Channel-split treats each channel independently, while channel-linked integrates across all channels.

Three of the supported loudness types use a popular modern measurement standard for perceived loudness called [LUFS](#). These loudness types are momentary (400ms window), short-term (3s window) and Integrated (infinite window).

There are also two [peak](#) loudness types (True Peak and Peak) as well as traditional [RMS](#). True Peak is an improvement on [peak](#) which takes into consideration waveform behavior between samples, which allows it to properly respond to inter-sample peaks. Peak mode loudness types use a [blocksize](#) window.

Integrated loudness type window can be reset by pressing the reset button.

### 2.1.3. Target range presets

---

Target range presets are provided for convenience as an example set of industry related loudness ranges. The average loudness and limiter peak are provided in the preset names in parenthesis. These values were transcribed from the [RTW](#) delivery standards page.

Currently, the following target range presets are available:

- Spotify Loud (-11, -2)
- Spotify/Tidal/YouTube (-14, -1)
- Deezer (-15, -1)
- Apple / Podcast (-16, -1)
- Podcast (Mono) (-19, -1)
- EBU R128, Broadcast (-23, -1)
- ATSC A/85, US TV (-24, -2)
- Netflix (-27, -2)

### 2.1.4. Output type

---

The output type options allows you to configure which type of samples to output.

- Default output type corresponds to Loudness Limiter's output
- Bypass output type corresponds to Loudness Limiter's source
- Delta output type corresponds to Loudness Limiter's output minus source

Output gain and dry/wet are bypassed for Delta output type

### 2.1.5. Limiter threshold

---

The limiter threshold parameter determines the loudness at which the limiter starts to apply gain reduction. Loudness values above threshold are raised to the [limiter ceiling](#).

### 2.1.6. Limiter ceiling

---

The limiter ceiling parameter determines the maximum peak loudness value that the limiter will allow. When the limiter detects a peak above this value, it will pre-emptively begin to apply gain reduction. Note that make-up gain is not automatically applied.

### 2.1.7. Limiter threshold link

---

The limiter threshold link parameter allows you to link the [limiter threshold](#) and [limiter ceiling](#) parameters. When linked, the ceiling will automatically adjust to match the threshold.

### 2.1.8. Limiter attack

---

The limiter attack parameter determines the amount of time to look into the future when detecting peaks. Shorter attack times will result in more aggressive gain reduction, with the results becoming more gritty and distorted. Longer attack times will result in more transparent gain reduction, but will push the average level of the audio further down.

Limiter attack requires that the [attack budget](#) parameter is configured via the [settings](#) tab. This method of look-ahead configuration is used to support real-time adjustments of look-ahead without causing stuttering which would otherwise interfere with A/B testing.

Note that [attack budget](#) adds latency to the limiter in order to function.

### 2.1.9. Look-ahead

---

The look-ahead parameter allows you to configure how far in advance the loudness measurement looks for the [source](#) signal. This can be used to align Loudness Limiter's response to account for the loudness window time and/or [release](#) time, or simply as a creative effect.

Look-ahead requires that the [look-ahead budget](#) parameter is configured via the [settings](#) tab. This method of look-ahead configuration is used to support real-time adjustments of look-ahead without causing stuttering which would otherwise interfere with A/B testing.

Note that [look-ahead budget](#) adds latency to the limiter in order to function.

### 2.1.10. Compensation target

---

The compensation target slider sets the loudness target used by compensation learning.

When Learn is active, Loudness Limiter compares the selected [compensation mode](#) output measurement against this target and updates the live [compensation gain](#). The target is independent from the individual limiter threshold and ceiling controls.

### 2.1.11. Compensation mode

---

The compensation mode combo-box chooses how Loudness Limiter measures the output signal while compensation learning is active.

- Average learns a single correction from the mean output loudness over the current render.
- Integrated learns a single correction from integrated output loudness over the current render.

Both modes are intended for learn-then-lock workflows: start learning on a representative pass, then lock the learned correction for normal playback or export.

Compensation is independent from the individual limiter enable chips. It is applied after loudness limiting and before Peak/True Peak limiting.

### 2.1.12. Compensation gain

---

The compensation gain slider stores an additional global gain offset in dB for Loudness Limiter.

The offset is applied after loudness limiting and before the peak limiters. This lets you correct delivery loudness while still allowing Peak and True Peak limiters to protect the output ceiling.

When compensation learning is off, you can edit this value directly for manual trim. When learning is on, the slider shows the live learned value, but the stored parameter is only updated once you lock learning.

### 2.1.13. Compensation action

---

The compensation action button changes behavior based on the current compensation state.

- Learn starts measuring the selected [compensation mode](#) and updates a live learned correction.
- Lock stops learning and commits the current learned correction into [compensation gain](#).
- Reset clears the stored [compensation gain](#) back to 0.00 dB.

Limiter learning is intended for a learn-then-lock render workflow: run a representative pass, lock the learned correction, then render normally.

### 2.1.14. RMS window

---

The RMS window parameter allows you to adjust the duration of the RMS window in milliseconds. Lower window durations respond more quickly to changes in loudness, while higher window durations provide a more stable loudness measurement. The RMS window is used by the RMS [loudness type](#).

### 2.1.15. Momentary window

---

The momentary window parameter allows you to adjust the duration of the momentary window in milliseconds. Lower window durations respond more quickly to changes in loudness, while higher window durations provide a more stable loudness measurement. The momentary window is used by the Momentary [loudness type](#).

### 2.1.16. Short-term window

---

The short-term window parameter allows you to adjust the duration of the short-term window in milliseconds. Lower window durations respond more quickly to changes in loudness, while higher window durations provide a more stable loudness measurement. The short-term window is used by the Short-term [loudness type](#).

### 2.1.17. Visualization

---

The visualization component displays a continuously evolving real-time view of your [source](#), [target](#), and [output](#) loudness over time. There are currently two main types of visualizations: [history](#) and [histogram](#). [History](#) displays a rolling window of the most recent history of loudness samples. [Histogram](#) divides this history up into buckets and displays the relative proportion of each bucket in real-time.

You can hover the mouse over a bucket to see the loudness range the bucket corresponds to.

The visualization component also displays the current [limiter ceiling](#) overlays for the active [loudness type](#), allowing you to see where limiting begins. Detailed visualization settings can be adjusted from the [visualization](#) tab, with some features also available by right clicking on the visualization component.

You can double-click the visualization component to resize and hide everything else.

### 2.1.18. Raster type

---

The raster type parameter allows you to specify the type of raster visualization. You can select between [history](#) and [histogram](#) views, with either loudness or delta values. Loudness values match the currently selected [loudness type](#) while delta values take the difference between [source](#) and [target](#) or [output](#) loudness.

Delta view is useful for determining how much loudness is being changed, and how much residual there is between [target](#) and [output](#) loudness.

You can also visualize [target](#) vs [output](#) residual via [breath residual](#) option.

### 2.1.19. Sidechain

---

The sidechain toggle allows you to enable/disable sidechain processing. When enabled, the source signal will come from the plug-in's sidechain channel(s). This allows you to drive compression/expansion using an external source, which can be used for example to [duck](#) the sidechain signal.

In order to prevent overshoots, Peak and True Peak limiting do not use the sidechain signal.

### 2.1.20. Ballistics type

---

The ballistics type combo-box allows you to change Loudness Limiter's ballistics behavior.

- Natural (dithered) applies light dithering to natural ballistics deltas.
- Natural (direct) applies normal smooth attack and release ballistics.
- Inertial (dithered) applies light dithering to inertial ballistics deltas.
- Inertial (direct) applies attack and release ballistics with inertia.

Inertial ballistics are more responsive to sudden changes in loudness, but may sound less natural.

### 2.1.21. IIR contour type

---

The IIR contour type combo-box allows you to change the LUFS [loudness type](#)'s IIR filter contour. The following contours are supported:

- K-weighting
- ECMA-418
- ITU-R 468
- A-weighting
- C-weighting

Contours other than K-weighting no longer conform to the LUFS standard, but are provided for flavor and perceptual precision.

### 2.1.22. Input gain

---

The input gain parameter allows you to apply additional gain to the input of the limiter.

### 2.1.23. Release

---

The release parameter allows you to specify the amount of time it takes for a given amount of gain amplification to be applied to the [source](#) signal. Attack is configured by [limiter attack](#), while release refers to the “release” of this gain reduction.

Release is a traditional ballistic parameter, similar to what you will find on most compressors. See the [Linear release](#) parameter for more direct release behavior. In addition to specifying the release in milliseconds, you can specify it in samples, BPM-relative units, or ratio of [look-ahead](#) duration.

### 2.1.24. Release hold

---

The release parameter allows you to specify the amount of delay before [release](#) phase begins.

Release hold maintains gain reduction (“attack”) for the specified release hold time.

### 2.1.25. Linear Release

---

The linear release parameter allows you to directly specify the rate of change in gain amplification applied to the [source](#) signal. Release refers to the “release” of the limiter’s gain reduction. More generally, release refers to gain amplification since it isn’t always necessary for the limiter to “attack” prior to “release” and the two are not always correlated.

The linear release parameter is different from traditional ballistic parameters. The actual rate of change in gain reduction with the traditional controls is dependent on both the attack or release time and the residual between target gain reduction and current gain reduction. This means the alterations made to the source signal are a complicated combination of the audio’s dynamics. For linear release, the actual rate of change is constant.

This setting can be configured to apply directly, completely overriding the [release](#) ballistics, or as a limit to the rate. The former can be a way to get extremely fast response, while the latter can serve as a barrier to prevent the limiter from releasing too rapidly during extreme fluctuations in [source](#) loudness.

### 2.1.26. Dry/Wet

---


The dry/wet parameter allows you to configure the percentage of limiting to mix into the dry signal.

### 2.1.27. Output gain

---

The output gain parameter allows you to apply additional gain to the output of the limiter.

## 2.2. Loudness

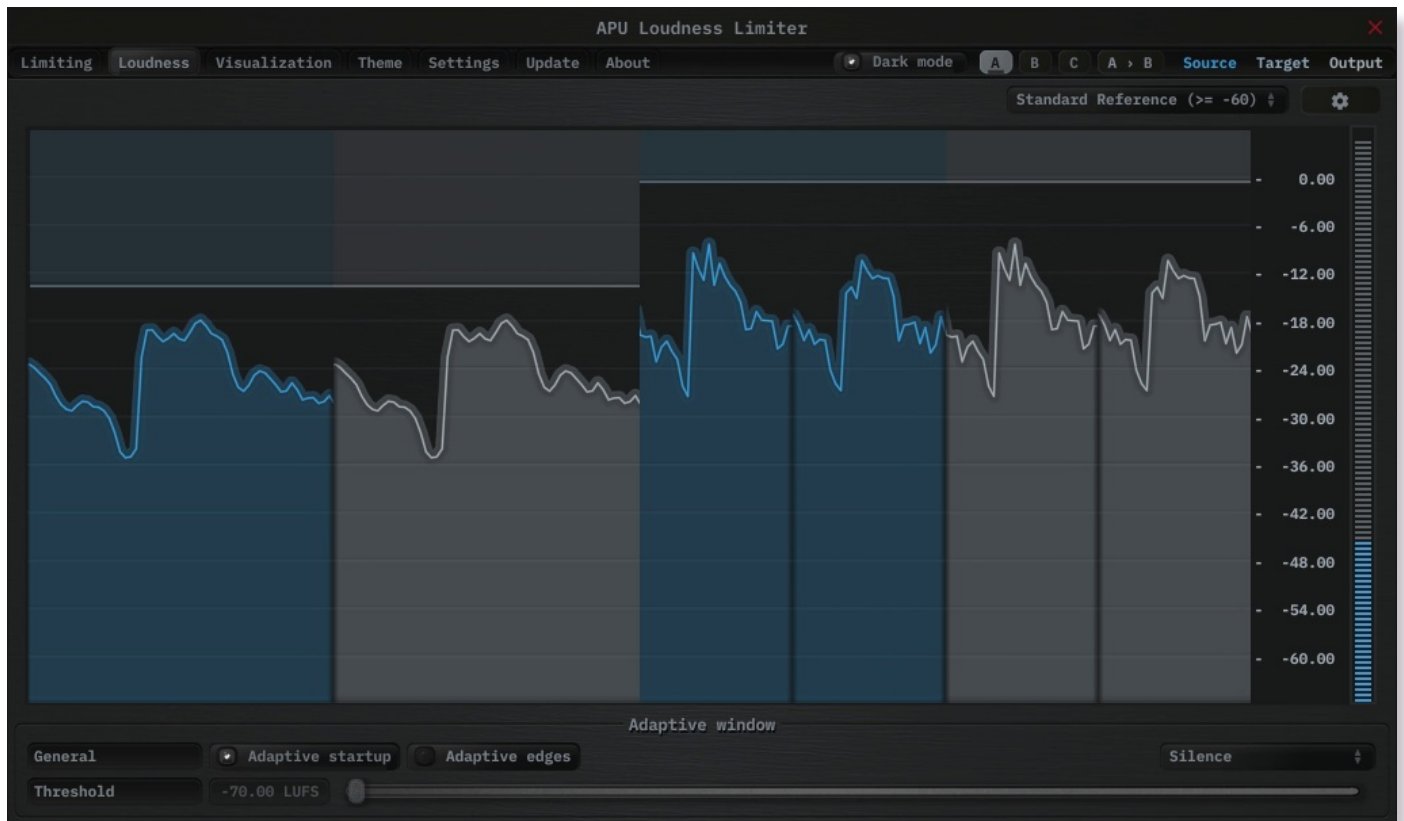

The loudness tab contains parameters relating to loudness measurements and detector behavior.

### 2.2.1. Adaptive startup

The adaptive startup parameter enables or disables adaptive startup behavior for loudness measurements. When enabled, the loudness window begins small and grows as the window fills. This can be useful for reducing transient artifacts at the start of playback.

### 2.2.2. Adaptive edges

The adaptive edges parameter enables or disables adaptive edge detection for loudness measurements. When enabled, loudness values crossing the configured [adaptive threshold](#), or silence, will be detected and the loudness window will be reset. This causes the [adaptive startup](#) behavior to apply to every transition to/from silence. This can be useful for reducing transient artifacts during sudden changes in loudness.

### 2.2.3. Adaptive type

The adaptive type parameter allows [adaptive startup](#) and [adaptive edges](#) to be configured for Silence or [adaptive threshold](#) modes. Silence mode will only reset the loudness window when the input signal is silent. Adaptive threshold mode will reset the loudness window when the input signal crosses the configured [adaptive threshold](#).

### 2.2.4. Adaptive threshold

The adaptive threshold parameter allows you to configure the threshold used by [adaptive edges](#) in [adaptive threshold](#) mode. This threshold is specified in the same units as the current [loudness type](#).

## 2.3. Visualization



The visualization tab contains parameters related to real-time configuration of Loudness Limiter's visualizations. This section describes these various settings.

### 2.3.1. Auto range

The auto range parameter enables or disables the visualization's auto range finding capabilities. This feature operates by analyzing the continuous histogram at each frame to determine a reasonable range for that moment in time. This range is then followed and adjusted smoothly over time.

### 2.3.2. Visual range presets

Visual range presets are provided for convenience as an example set of industry related loudness ranges.

Currently, the following visual range presets are available:

- Auto Range (Global)
- Auto Range (Per Panel)
- Limiter Focus ( $\geq -30$ )
- Standard Reference ( $\geq -60$ )
- Full Range ( $\geq -70$ )
- Custom Range ...

### 2.3.3. Loudness range

The loudness range parameter allows the visualization loudness range to be set manually. In order for this range to be enabled and used, the [visual range presets](#) parameter must be set to "Custom Range"

Note that there are separate loudness ranges for windowed loudness types and peak loudness types.

See [range sliders](#) for information about range sliders in general.

### 2.3.4. Snapshots

The snapshots feature allows you to take a snapshot of the current histogram. This can be useful for comparing histograms.

Each source/target/output signal has its own snapshot. The snapshots are persisted with plug-in state, so they will be available when you reopen the project.

Snapshots can be operated using the popup menu or via keyboard shortcuts.

The following snapshot parameters are available:

- Save/clear snapshot (saves or clears the current histogram)
  - Source = Cmd + 1
  - Target = Cmd + 2
  - Output = Cmd + 3
- Fill snapshot (fills the area under the snapshot)
  - Source = Cmd + Alt + 1
  - Target = Cmd + Alt + 2
  - Output = Cmd + Alt + 3
- Show/hide snapshot (shows or hides the snapshot in the visualization)
  - Source = Cmd + Shift + 1
  - Target = Cmd + Shift + 2
  - Output = Cmd + Shift + 3

On Windows, use Ctrl instead of Cmd.

### 2.3.5. Layout options

The options menu allows you to configure the layout of the visualization. The following options are available:

- [layout source mode](#) : Specifies the layout mode for the [source](#) signal.
- [layout target mode](#) : Specifies the layout mode for the [target](#) signal.
- [layout output mode](#) : Specifies the layout mode for the [output](#) signal.
- [raster type](#) : Specifies the type of raster visualization.
- [show thresholds](#) : Specifies whether or not to show thresholds.
- [show peak meter](#) : Specifies whether or not to show peak meter.
- [show history peak](#) : Specifies whether or not to show history peak hold.
- [show axis labels](#) : Specifies whether or not to show loudness axis labels.
- [show axis lines](#) : Specifies whether or not to show loudness axis lines.
- [show param context](#) : Specifies whether or not to show parameter context while certain parameters are changing.

Each layout mode has an AUTO option which automatically selects the best layout mode based on the current context.

### 2.3.6. Layout source mode

The layout source mode parameter allows you to configure the layout of the visualization's source panel.

Currently, the following layout source modes are available:

- None (No source panel is displayed)
- Auto (Automatically selects the best layout mode based on the current context)
- Source only (Draws just the [source](#) signal)
- Source over Target (Draws the [target](#) signal first, then the [source](#) signal on top)
- Source over Output (Draws the [output](#) signal first, then the [source](#) signal on top)

### 2.3.7. Layout target mode

---

The layout target mode parameter allows you to configure the layout of the visualization's target panel.

Currently, the following layout target modes are available:

- None (No target panel is displayed)
- Auto (Automatically selects the best layout mode based on the current context)
- Target only (Draws just the [target](#) signal)
- Target over Source (Draws the [source](#) signal first, then the [target](#) signal on top)
- Target over Output (Draws the [output](#) signal first, then the [target](#) signal on top)

### 2.3.8. Layout output mode

---

The layout output mode parameter allows you to configure the layout of the visualization's output panel.

Currently, the following layout output modes are available:

- None (No output panel is displayed)
- Auto (Automatically selects the best layout mode based on the current context)
- Output only (Draws just the [output](#) signal)
- Output over Source (Draws the [source](#) signal first, then the [output](#) signal on top)
- Output over Target (Draws the [target](#) signal first, then the [output](#) signal on top)

### 2.3.9. Delta field type

---

The delta field type parameter allows you to specify the type of delta field used by the visualization.

The delta field is basically a mapping from each source pixel on the screen to a destination pixel. Pixel shaders are used to iteratively apply this delta field using interpolation and some light dithering effects. This feature is purely for aesthetic purposes and has no effect on the audio.

[Raster type](#) effects are drawn into the delta field on each frame.

### 2.3.10. Bits per pixel

---

The bits-per-pixel parameter determines the number of bits per pixel to use when rendering visualizations. The default bpp is the best performing. You can increase bpp to improve visual quality.

### 2.3.11. Breath residual

---

The breath residual parameter can be used to help visualize limiter behavior. For each frame of the visualization, the current residual between [target](#) and [output](#) loudness is calculated and used to multiply the magnitude of the visualization delta field.

This feature helps you find sections of audio where the limiter is having a difficult time keeping up with the amount of [target](#) gain. This can help guide the configuration of the [release](#) and [linear release](#) parameters. The direction of the multiplication factor is also set to reflect whether the residual occurred in the attack or release direction, so it's possible to get a sense of the overall balance between these residuals.

### 2.3.12. Bar Mode

---

The "Bar mode" parameter enables/disables bar mode. In bar mode, the visualizations will be drawn as vertical bars instead of sloped lines. This feature is purely for aesthetic purposes and has no effect on the audio.

### 2.3.13. Bucket size

---

The bucket size parameter determines the size in pixels of visualization buckets (rectangles).

### 2.3.14. Histogram hold

---

The histogram hold parameter enables or disables “hold” mode for the [histogram](#) raster types. While “hold” mode is enabled, the histogram will continuously accumulate measurements indefinitely. This can be used to capture a full duration view of your source audio. This allows you to easily adjust ranges to target to a specific region of the full dynamic range.

The histogram will still continuously accumulate measurements while “hold” mode is disabled, but for each new measurement the oldest measurement in history is replaced. This results in a continuously evolving histogram of duration specified by the [history length](#) parameter.

### 2.3.15. Delta X/Y/T

---

The delta X/Y/T parameters are provided to the visualization [delta field](#) in order to manipulate the delta field in real-time. The exact behavior of each parameter depends on the active [delta field type](#).

### 2.3.16. Delta field

---

The delta field parameter allows you to enable or disable the visualization delta field.

The delta field is basically a mapping from each source pixel on the screen to a destination pixel. Pixel shaders are used to iteratively apply this delta field using interpolation and some light dithering effects. This feature is purely for aesthetic purposes and has no effect on the audio.

[Raster type](#) effects are drawn into the delta field on each frame.

### 2.3.17. Shader params

---

The shader parameters control various aspects of visualization rendering. The following options are available:

- Shader param 1: Delta field fade rate. Lower values leave longer trails.
- Shader param 2: Curve fill transparency. Lower values make the curve more transparent, leaving only the edge(s) visible.
- Shader param 3: Curve edge thickness. Lower values make the edge thinner.

### 2.3.18. Show thresholds

---

The show thresholds parameter allows you to enable or disable threshold drawing in the visualization.

If this option is disabled, thresholds will still be drawn while changing the associated parameters.

Thresholds include [limiter ceiling](#) for each [loudness type](#).

### 2.3.19. Panel params

---

The panel parameters control various aspects of panel rendering. The following options are available:

- Panel param 1: Panel alpha (transparency), 0.0 to remove panel completely
- Panel param 2: Panel hue (rotates through normal, source, target, output).
- Panel param 3: Panel hue intensity

### 2.3.20. History length

---

The history length parameter allows you to change the duration of visualization history. This history is a rolling-window where each new loudness sample pushes out the oldest sample, maintaining a continuous history length with the duration you've configured here. Note that this setting applies both to [history](#) and [histogram](#) raster types.

During [histogram hold](#) the histogram has an effectively infinite history length.

### 2.3.21. Show peak meter

The show peak meter parameter allows you to enable or disable peak meter and gain reduction drawing next to the visualizer.

Positive gain delta is drawn from bottom-up, negative gain delta is drawn from top-down.

### 2.3.22. Show history peak

The show history peak parameter allows you to enable or disable peak hold drawing for [history](#) raster visualizations.

This option is only shown while the active [raster type](#) includes history.

### 2.3.23. Show axis labels

The show axis labels parameter allows you to enable or disable axis drawing in the visualization.

The axis is scaled relative to the [loudness range](#), which can be manual or [auto range](#).

### 2.3.24. Show axis lines

The show axis lines parameter allows you to enable or disable axis line drawing in the visualization.

axis lines are drawn at each [Show axis labels](#).

### 2.3.25. Show param context

The show param context parameter allows you to enable or disable param context text bubbles during parameter changes.

## 2.4. Theme



The theme tab contains parameters related to color themes. Here you can select between the bank of color theme presets, or configure the individual colors yourself.

### 2.4.1. Theme presets

---

The theme presets combo-box allows you to switch between a variety of theme presets. Each theme has a light and dark variation. Switching between theme presets will load values into [source color](#), [normal color](#), [target color](#) and [output color](#).

Currently, the following themes are available:

- APU Default
- APU Red
- APU Vermilion
- APU Orange
- APU Amber
- APU Yellow
- APU Lime
- APU Chartreuse
- APU Harlequin
- APU Green
- APU Erin
- APU Spring
- APU Aquamarine
- APU Cyan
- APU Turquoise
- APU Azure
- APU Cerulean
- APU Blue
- APU Indigo
- APU Violet
- APU Purple
- APU Magenta
- APU Raspberry
- APU Rose
- APU Crimson

### 2.4.2. Source color

---

The source color parameters control the red, green, and blue components of the [source](#) color.

The source color is used in a variety of contexts, from interactive widgets to visualization elements. This color signifies that an element relates to the [source](#) signal in some way. This color is expected to contrast against the [normal color](#) to some extent.

### 2.4.3. Normal color

---

The normal color parameters control the red, green, and blue components of the “normal” color.

The normal color is used in a variety of contexts, from interactive widgets to visualization elements. This color signifies that an element is essentially neutral, not related to [source](#), [target](#) or [output](#) signal. This color is expected to contrast against the [source color](#), [target color](#), and [output color](#) to some degree.

### 2.4.4. Target color

---

The target color parameters control the red, green, and blue components of the [target](#) color.

The target color is used in a variety of contexts, from interactive widgets to visualization elements. This color signifies that an element relates to the [target](#) signal in some way. This color is expected to contrast against the [normal color](#) to some extent.

## 2.4.5. Output color

The output color parameters control the red, green, and blue components of the [output](#) color.

The output color is used in a variety of contexts, from interactive widgets to visualization elements. This color signifies that an element relates to the [output](#) signal in some way. This color is expected to contrast against the [normal color](#) to some extent.

## 2.4.6. Textures

The textures configuration allows you to change the user interface textures.

The panel texture is used for the background of the user interface and has the [shader params](#) applied. The meter texture is used to fill the visualization effects. The background texture is used throughout the plug-in for shading.

These settings are stored with user scope, so you don't need to change them with every instance. Closing a texture will revert to the default internal texture.

Typically, the panel texture should be very dark and the meter texture should be very light.

## 2.5. Settings



The settings tab contains various additional parameters. These parameters are broken down between General and Latency parameters. Since Latency parameters impact [delay compensation](#), changes to these parameters are deferred until you click the Apply button. It is generally not advisable to automate the parameters in the Latency section.

### 2.5.1. BPM

The bpm option allows you to set the BPM used by tempo-relative parameters.

### 2.5.2. Host BPM

The host bpm option enables usage of the host's BPM for tempo-relative parameters. When disabled, the [bpm](#) parameter is used instead.

This parameter is not available (nor applicable) to the standalone application.

### 2.5.3. Dither

---

The dither parameter determines the strength of ballistics dithering. This parameter applies only to dithering [ballistics type](#) modes.

### 2.5.4. Velocity sensitive knobs

---

If enabled, this will turn on velocity-sensitive dragging, so that the faster the mouse moves, the bigger the movement to the knobs. This helps when making accurate small-scale adjustments.

This parameter is saved at user scope, so it will be remembered between sessions.

### 2.5.5. UI Scaling

---

The UI scaling option allows you to set the scaling of the user interface. This is useful for high-DPI displays, where the default scaling may be too small to read comfortably.

This parameter is saved at user scope, so it will be remembered between sessions.

### 2.5.6. Axis Scaling

---

The axis scaling option allows you to set the scaling of the axis ticks, labels and text bubbles. This is useful for high-DPI displays, where the default scaling may be too small to read comfortably.

This parameter is saved at user scope, so it will be remembered between sessions.

### 2.5.7. Dark mode

---

The dark mode toggle enables/disables dark mode. When enabled, theme colors have their brightness inverted.

### 2.5.8. Gain change write

---

The gain change write mode controls how the plug-in publishes the latest signed gain change to the host as an automatable parameter. This can be useful for recording the plug-in's gain changes directly to an automation lane when supported by the DAW.

Disabled turns gain change write off.

Native uses the format-native write path when available. For non-VST3 plug-ins, Native falls back to the same behavior as Compatibility.

Compatibility uses the generic host-notify write path, which may work in more places but is less elegant than Native when the host supports the native path.

Host support for plug-in generated automation varies. When supported, put the host into Write or Touch mode and record the Gain Change Write parameter.

Gain change write is output-only. The recorded automation lane is not read back into the plug-in's processing.

### 2.5.9. Blocksize

---

The block size parameter determines the time resolution of Loudness Limiter's [source](#) loudness measurements. Generally speaking, lower block sizes will give more accurate results. However, lower block sizes also require more CPU resources, so it is necessary to find a balance. You can squeeze improved quality and/or performance out of the limiter by tuning this setting based on your available CPU resources.

Fast attack and/or release times may benefit from similarly low block size.

BPM units for block size are evaluated once at the time you press Apply.

### 2.5.10. Look-ahead budget

---

The look-ahead budget parameter determines the latency budget which is available for the [look-ahead](#) parameter. Once you have configured a look-ahead budget, you can adjust the [look-ahead](#) parameter in real-time within this range without introducing artifacts.

### 2.5.11. Attack budget

---

The attack budget parameter determines the latency budget which is available for the [limiter attack](#) parameters. Once you have configured an attack budget, you can adjust the [limiter attack](#) parameters in real-time within this range without introducing artifacts.

### 2.5.12. Delay compensation

---

The delay compensation parameter determines whether or not the plug-in will report latency to the host. Delay compensation is used by hosts to keep audio synchronized across channels.

The delay compensation option is not available (nor applicable) to the standalone application.

## 2.6. Update

---

The update tab allows you to check for the latest product versions. Just click "Check for updates" to see the latest version numbers. If you're not running the latest version, you can click "Download" to open the download page in your default browser.

## 2.7. About

---

The about tab contains basic information about the plug-in. This is also where you can activate or deactivate your product keys and check license status.

## 3. Standalone CLI

---

APU Loudness Limiter's standalone application exposes a small user-facing command-line interface for loading, saving, and resetting standalone preset files. This section documents the supported options only.

Supported options:

- `--help` prints the supported standalone CLI options and exits.
- `--resetParams` resets parameters after the standalone app loads its remembered state.
- `--loadPreset=<path>` loads a preset file before the window is shown.
- `--savePreset=<path>` writes the resulting preset file and exits without opening the user interface.

Processing order:

- The standalone app first loads its normal remembered standalone state.
- If `--resetParams` is present, a full parameter reset is applied.
- If `--loadPreset` is present, that preset file is loaded next.
- If `--savePreset` is present, the resulting state is written to disk and the app exits immediately.

Examples:

- `<standalone-app> --help`
- `<standalone-app> --savePreset="C:\Temp\limiter-startup.preset"`
- `<standalone-app> --resetParams --savePreset="C:\Temp\limiter-reset.preset"`
- `<standalone-app> --loadPreset="/tmp/limiter-session.preset"`
- `<standalone-app> --loadPreset="/tmp/limiter-session.preset" --savePreset="/tmp/limiter-copy.preset"`

Compatibility:

- `--loadPreset` and `--savePreset` use the same file format as the standalone app's standard JUCE options-button commands, `Save current state...` and `Load a saved state...`
- These file-based presets store the full standalone processor state. They are different from the in-app [presets](#) combobox, which loads the product's built-in preset entries and user preset-list selections.

## 4. Glossary

---

This section defines some of the concepts used within the software.

### 4.1. Range sliders

---

Range sliders are used throughout the plug-in in order to specify the upper and lower boundaries of a range. These ranges can be controlled via mouse in various ways.

- Click and drag the lower thumb to adjust the minimum value.
- Click and drag the upper thumb to adjust the maximum value.
- Click and drag the region between slider thumbs to move both values. This allows you to adjust the average loudness without expanding/contracting the dynamic range.
- `Ctrl` + click and drag the region between slider thumbs to expand/contract range without changing the average (center) value. Drag the mouse up and down, left and right are ignored.
- `Shift` + click and drag the region between slider thumbs to combine both. Drag the mouse up and down to expand/contract range. Drag the mouse left and right to move both values.

### 4.2. History

---

One of the primary views into your audio that this software provides is real-time history. The history view maintains a recent history of loudness measurements, continuously displaying them in [FIFO](#) order. This view helps you understand how the signal is changing over time, in real-time. [History length](#) and [bucket size](#) can be configured dynamically without forcing the history to reset.

### 4.3. Histogram

---

One of the primary views into your audio that this software provides is a real-time histogram. Histograms in general provide a quick and intuitive way to understand the relative frequency of different measurements. This is very useful when judging the overall dynamic range of the audio. The histogram provided by this software is capable of changing [history length](#), [bucket size](#) and size continuously.

### 4.4. Source

---

The term “source” is used throughout the plug-in to identify the plug-in’s input source signal. This signal is represented in the user interface by the current theme’s [source color](#).

### 4.5. Target

---

The term “target” is used throughout the plug-in to identify the “ideal” target output loudness. The actual loudness achieved depends on [release](#) and [linear release](#) parameter settings.

### 4.6. Output

---

The term “output” is used throughout the plug-in to identify the actual output loudness. This can differ from [target](#) loudness due to non-instantaneous [release](#) and/or [Linear release](#) parameter settings.

## 5. Credits

---

This software was developed by [APU Software, LLC](#) and is available as VST (windows x64/x86, macOS universal), Audio Unit (macOS universal), Pro Tools AAX (windows x64, macOS universal), or Standalone Application (windows x64/x86, macOS universal). The software libraries below are utilized for portions of the software:

- [JUCE](#) (cross-platform audio and user interface framework)
- [Boost](#) (header-only algorithms)
- [libebur128](#) (loudness measurements)
- [melatonin\\_blur](#) (blur effects)

Demo video song credits:

- Tea Time - Warm-Up Rhythm, licensed via [Shutterstock](#)
- 



## 5.1. MIT License (libebur128)

---

Copyright (c) 2011 Jan Kokemüller

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

## 5.2. MIT License (melatonin\_blur)

---

Copyright (c) 2023 Sudara Williams

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.